
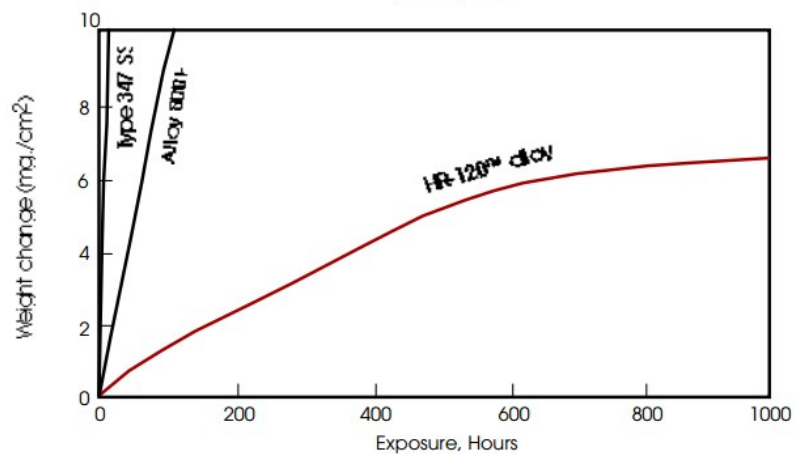


HAYNES[®] HR-120[®] alloy

Comparative Sulfidation Resistance

Independent outside testing laboratories have also verified the superior performance of HR-120[®] alloy in sulfidizing environments. Petten Establishment in the Netherlands found that HR-120[®] alloy performed significantly better than alloys 800H, 347SS and 321SS at 1290°F (700°C) in hydrogen plus 7 percent carbon monoxide plus 1.5 percent water vapor plus 0.6 percent hydrogen sulfide. The HR-120[®] alloy was found to be magnitudes better than the other alloys.

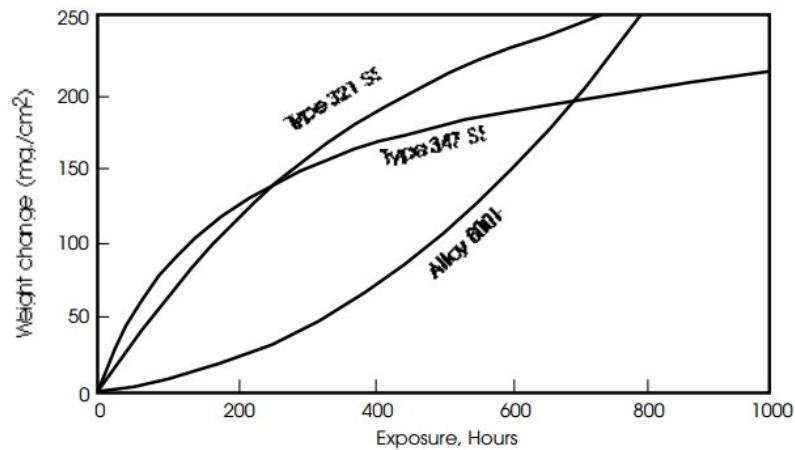

$H_2+7\%CO+1.5\%H_2O+0.6\%H_2S$ at 1290°F (700°C)
 $P_{O_2}=1 \times 10^{-23}$ atm.
 $P_{S_2}=1 \times 10^{-9}$ atm.
 $a_c=0.3-0.4$

[Print Page](#)

[Download Page](#)