


HAYNES[®] 282[®] alloy


Low Cycle Fatigue

Low-Cycle Fatigue Data – HAYNES[®] 282[®] Sheet* (Thickness 0.125", 3.2 mm)

*Age-hardened at 1850°F(1010°C)/2h/AC + 1450°F(788°C)/8h/AC

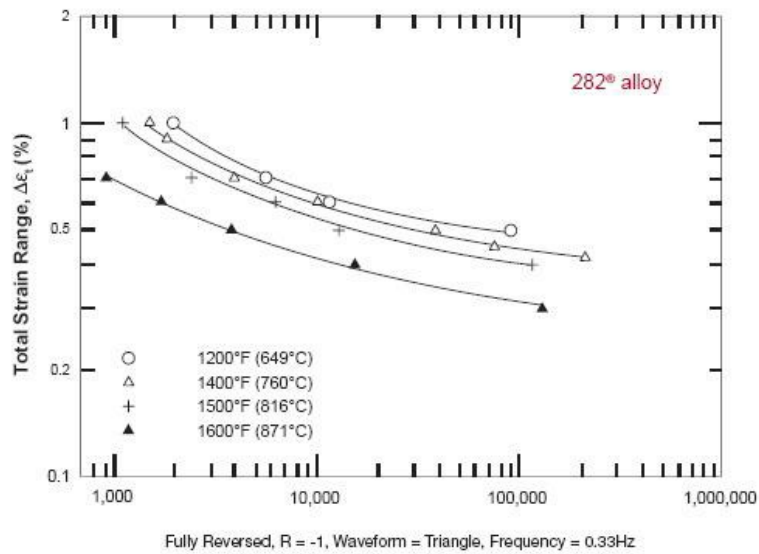

Comparative Low-Cycle Fatigue Data

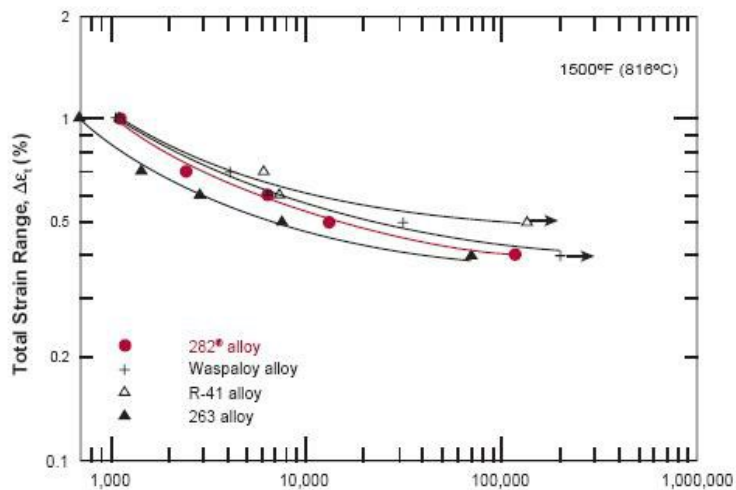

1500°F (816°C), Fully Reversed, R = -1, Waveform = Triangle, Frequency = 0.33Hz, Material: 0.125"(3.2 mm) Sheet*